


is specially design for all kinds of frozen and fresh dough, especially for puff pastry, such as croissant, Danish, puff, egg tart, and so on with great evenness. Atoll 600 only needs 220V/15A, is a perfect "show" unit for building atmosphere in almost anywhere while offering high quality baking result. It is ideal for all kinds of in-store bakery, coffee shop, hotel and restaurant, which also features:



K03-64X3D00RK

- Double glass design, easy for observation and cleaning
- Bidirectional hot air circulation for even baking result
- Electromagnetic door lock, the door opens automatically when baking program finishes
- Up to 30 programs with step-baking setting, ideal for frozen dough
- Removable water tank with compact design, ideal for limited space

- USB port option for easy program store and transfer for chain operation
- Optional underframe proofer or trolley for your convenience
- Control system: Programmable PCB
- Special size baking tray 440x350mm, 3 trays each baking cycle
- Other models: larger version Atoll 800 and Puff version for your option







1) Height with rollers, other height upon request – special dimension possible at extra charge.


2) Steam hood is upon request

Technical data		Atoll 600
Model-Nr.		K03-64X3D00RK
Outside Dimensions (WxDxH) (mm)		600x720x538
Total Tray Capacity		3 levels 3pcs 440x350mm
Voltage(V)		240v~, 50/60Hz, PE
Weight (kg)		60
Current(A)		15
Power (kW)		3.3
Underframe with tray support		
Height of Underframe with tray support(mm) ¹⁾		1022
Tray capacity (600x400mm)		8 trays
Weight approx. (kg)		23
Proofer with tray support		
Height of Proofer with tray support (mm) ¹⁾		1020
Tray capacity (600x400mm)		6 trays
Power supply(kw)		1.35
Weight approx. (kg)		64
Steam hood		
Steam hood height(mm) ²⁾		190
Steam hood weight approx. (kg)		10

Kolb® Convection Atoll Oven 600 K03-64X3D00RK

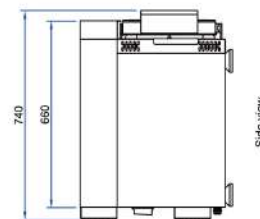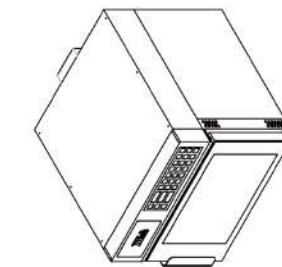

A	Water outlet	Ø12 mm
D	Dimension	600(W)x720(D)x538(H) mm
N	Total power consumption & Voltage	3.2 kW (14.2 A) : 220V~50/60Hz, PE 3.3 kW (15 A) : 230V~50/60Hz, PE
V	Optional voltage	240V~ (Specify on order)
S	Steam discharge	Ø63 mm
T	Weight	60 kg
W	Water tank removable	3 L
Wd	Water tank minimum distance to walls	50 mm
Wd	Left side and Right side	50 mm
	Rear side	170 mm

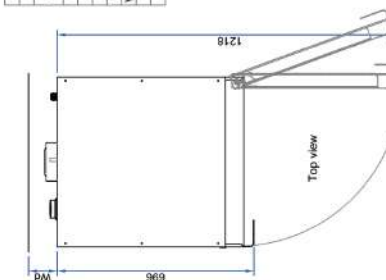

Signature: _____
Date: _____

Unassigned Tolerance According to DIN ISO 2768-1									
Dimension	0.3 To 6	6 To 30	30 To 120	120 To 400	Radius	3 To 6	mm	mm	mm
Tolerance	±0.1	±0.2	±0.3	±0.5	±0.2	±0.5	mm	mm	mm
Kolb Huizhou Ltd.									
Tel: +86 (0)752 6111 203 ext. 219 Mail: info@kolbon.com Website: www.kolbon.com									
Tolerance	Customer Title: Atoll Oven 600								
X±	Material: SS304								
X×	Version: 01								
XX±	Kolb Item Number:								
XX×	Kolb Item Name: Convection Atoll Oven 600								
		Weight	Thickness	Item Number	Page				
				K03-64X3D00RK	1/1				