


S121 Soft Serve Twin Twist Freezer Table Top



Air Pump

Gravity

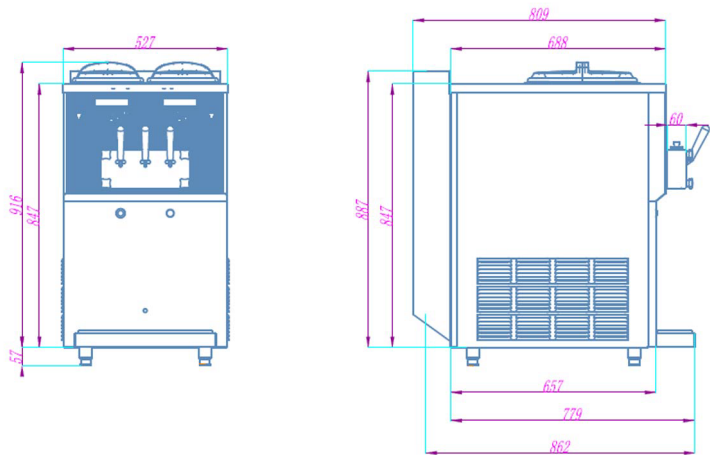

Features:

- Offers all of the popular soft serve variations from low to non-fat ice creams, custards, yogurt, Italian ices and sorbet

BEATER

- Food grade stainless steel 3014 beater

CONTINUOUS DISCHARGING ABILITY

- Ensures continuous discharge even during peak hours

STAND-BY FUNCTION

- Stand-by option for both hopper and cylinder
- Ensures the safety and hygiene of the liquid ice cream

IMPORTED CORE ACCESSORIES

- Aspera compressors and Danfoss expansion valves
- Ensures the service life of the machines

PASTEURIZATION

- No-clean for 14days, keep the mixture fresh all the time

INTEGRATED CYLINDER

- Perfect insulation effect
- Easy to clean

Technical Specs:

GENERAL INFO

MODEL NUMBER	S121
TYPE	table top
PRODUCTION CAPACITY	50 L / H
NUMBER OF FLAVORS	3
NUMBER OF HOPPERS	2
HOPPER CAPACITY	9.5Lx2
SPECIFICATIONS	810x522x885mm
CARTON SIZE	970x630x1090mm
NET WEIGHT	168kg(F) 250kg(P)
GROSS WEIGHT	183kg(F) 273kg(P)
CYLINDER CAPACITY	2.0Lx2
BEATER TYPE	stainless steel
HOPPER MIXER	standard
POWER	3.5Kw(F) 4.5KWw(P)
SELF-CHECK	yes
LOW MIXTURE SENSOR	yes
FREQUENCY CONVERSION	yes

REFRIGERATION SYSTEM

NUMBER OF COMPRESSORS	2
COMPRESSOR BRAND	Aspera
COMPRESSOR CAPACITY	3753 Btu / hr
COMPRESSOR GAS	R404 A
GAS QUANTITY	800gx2
REFRIGERATION TYPE	air cool / water cool

TRANSMISSION

NUMBER OF MOTORS	2
MOTOR CAPACITY	750Wx2

*production capacity depends on the mix used and the room temperature
All specifications mentioned must be considered approximate; Pasmo reserves the right to modify, without notice, all parts deemed necessary

Product List:

Electrical		Maximum Fuse Size	Equipment Current	Power
220V/50Hz	Air(Gravity)	30	12	2.8
220V/60Hz	Air(Gravity)	35	14	3
380V/50Hz	Air(Gravity)	10	7	2.8
380V/50Hz	Air(Air Pump)	20	10	4
220V/60Hz	Air(Air Pump)	30	18	4
220V/50Hz	Air(Air Pump)	30	16	3.7

No.69 Dejian Road, Jiangkou Food Industrial Zone,
Huangyan, Taizhou Zhejiang China
Phone:86(576)84088555
www.pasmochina.com
dorothy@pasmochina.com

